




PENDU NOTCHER-STACKER COMBO

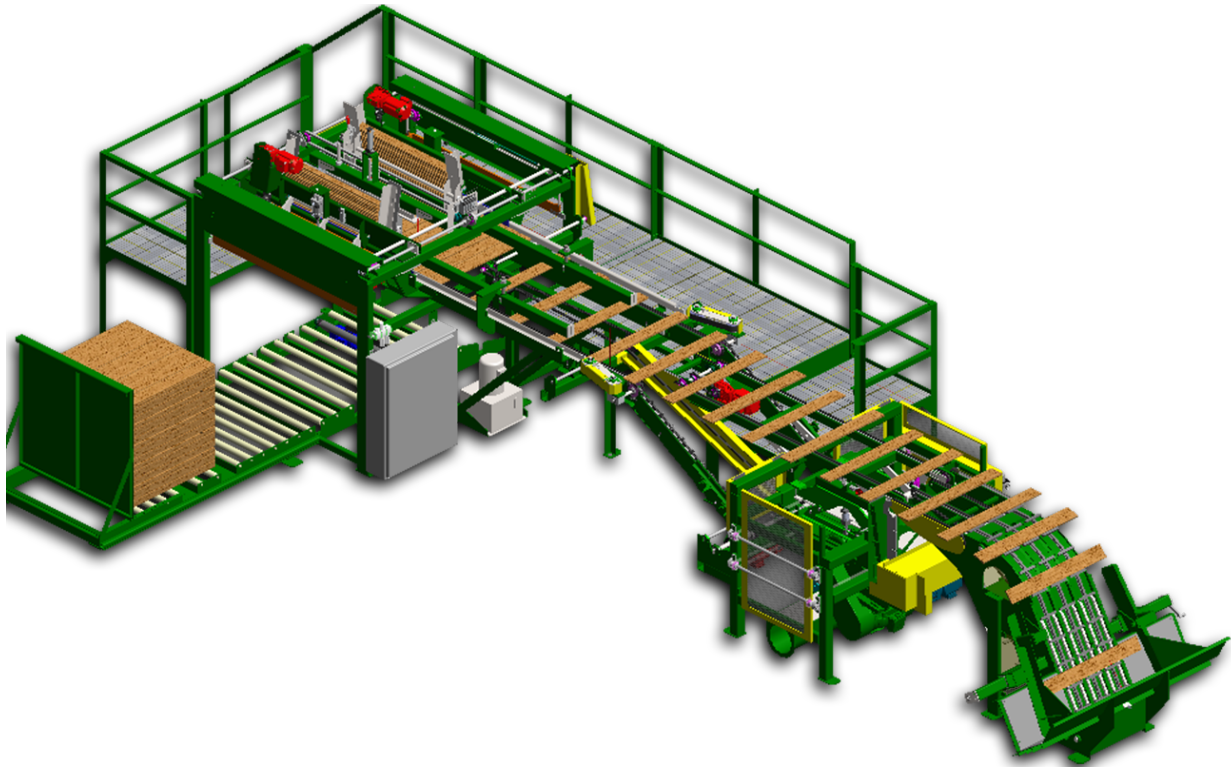

TWO MACHINES IN ONE

The Pendu notcher-stacker combo machine provides the versatility for you to notch stringers and send them straight to the stacker, or simply lower the top bypass conveyor and bypass the notcher to send un-notched stringers and deck boards to the same stacker. Notch up to 7000 stringers per hour and stack up to 25 layers per minute with the notcher-stacker combo.

Stacker Specifications

Stack Rate	Up to 25 layers per minute
Stack Size	Up to 48" W x 50" H x 72" L
Stack Lengths	28" to 72"
Board Sizes	1/2" x 3 1/2" to 2" x 6"
Motors	Electric Powered
Mode	Automatic or Manual
Speed	Variable Speed Feed

Notcher Specifications

Production Rate	Up to 7000 Stringers Hr
Material Capacity	1" x 3.5" up to 2" x 4"
Material Lengths	36" to 72"
Cutters	9" wide notch
Dist. Between Notches	6" to 36"
Notch Depth	Up to 2.5"
Cutter Head Diameter	12" indexible carbide tips
Arbors	Cantilevered - 2.25 diam.
Cutter Head Motors	Two 30HP TEFC motors



718 North Shirk Road • New Holland, PA 17557 • 800-233-0471 • www.Pendu.com

© 2022 Pendu Manufacturing, Inc.