




Auxiliary Hydraulic Power Units

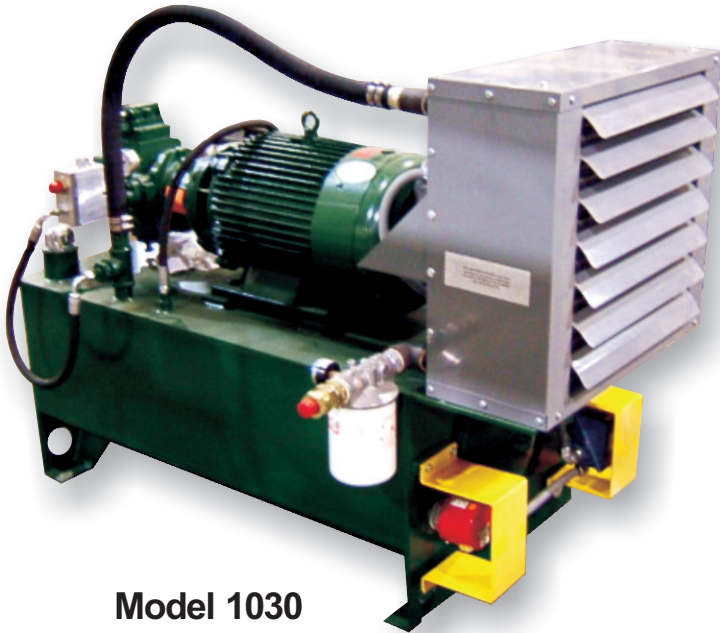

Model 1030

Model 1015




Power to Spare

All Pendu Auxiliary Hydraulic Power Units are closed pressure compensated and will supply all the power necessary to keep your equipment operating smoothly and efficiently. 480 volt Across the Line Starters are available as optional equipment on all models. Standard hydraulic pressure is 1250 psi and maximum pressure is 3600 psi. Heavy-duty construction with thermostat, heater and cooler standard on 1015, 1030, 1030D and 1045 models.

Auxiliary Hydraulic Power Unit

Model	1010	1015	1030	1045
GPM Pump	10	15	30	45
Tank (Gallon)	20	60	60	150
HP / Motor	7.5 TEFC	15 TEFC	30 ODP	40 ODP
1-1/4" Connect Hose Kit	NA	Std.	Std.	Std.
Check Valve	NA	Std.	Std.	Std.
Dump Valve	NA	Std.	Std.	Std.

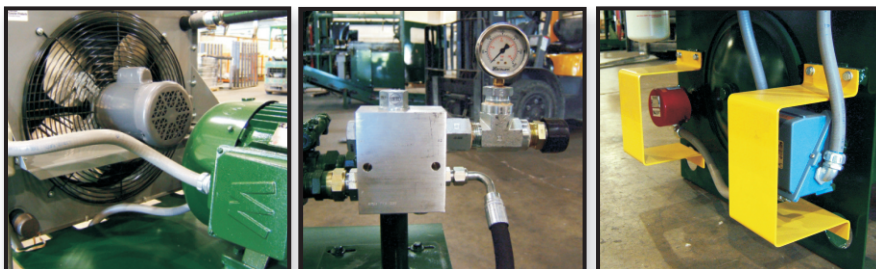

More Than Machines

718 North Shirk Road • New Holland, PA 17557 • 800-233-0471

www.pendu.com