




# Model 5400 Band Saw

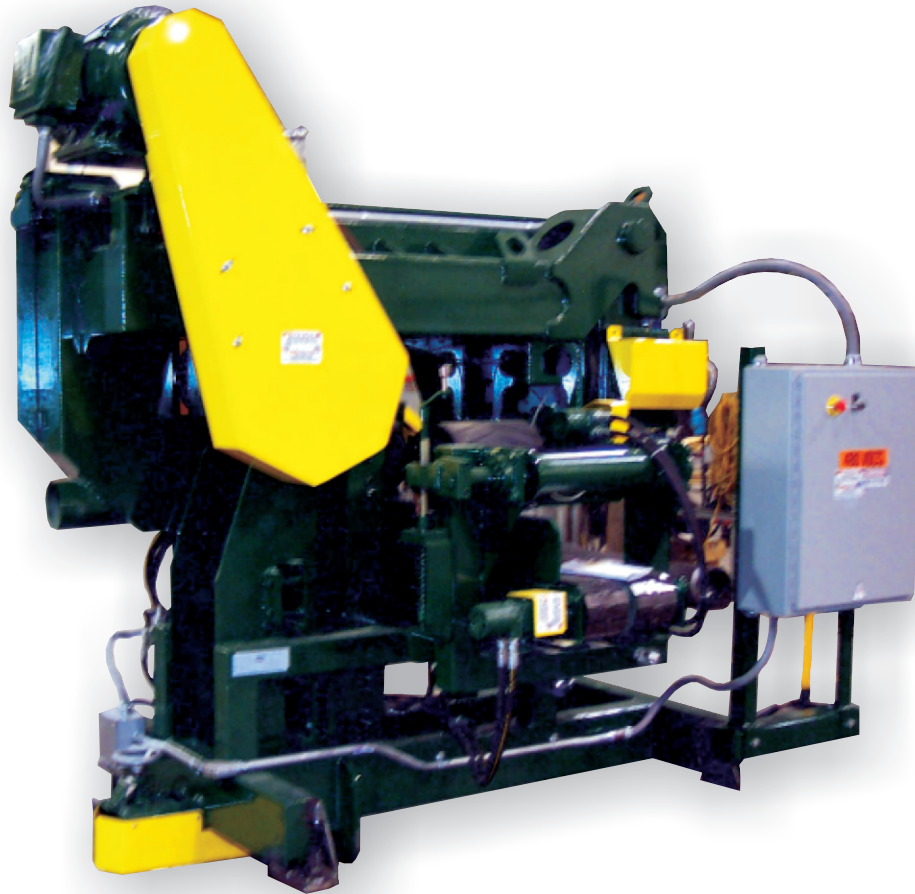

## Consistent Cutting Power.

Capable of handling material up to 8" high X 12" wide, the Pendu Model 5400 Band Saw can be operated as a single unit or as part of a multi-head system. The top-powered feed system, in conjunction with the heavy-duty, hardened-steel 8' table top conveyor provides a positive feed both into and away from the blade. The system is hydraulically powered for a smooth, consistent feed at variable speeds. A 2"-wide Lennox band, tensioned by a pneumatic regulator, incorporates a unique outboard bearing design for the arbor shaft, resulting in a more stable platform for the drive wheels. Optional equipment includes a ProScale Digital readout with motorized up and down height adjustment.

### 5400 Band Saw Specifications

Cutting Capacity	Up to 8" X 12"
Manual Height Adjustment	Standard
Variable Feed Speed	0 to 100 Feet per Minute
Infeed / Outfeed	Hydraulically Driven Top Hold Down Rolls
Table Top Conveyor	Hardened Steel / 8' Long
2" Lennox Band	Other Sizes Available
Drive Wheel / Idler Wheel	36" Dia. X 1-1/2" / 35" Dia. X 1-1/2"
Motor	40 Horsepower TEFC Electric Motor
Band Tension	Pneumatic with Low Pressure Shut-Off Switch



**More Than Machines**

718 North Shirk Road • New Holland, PA 17557 • 800-233-0471

[www.pendu.com](http://www.pendu.com)